


## Overall dimension



Model	Shape size (mm)									
	A	B	C	D	E	F	L	H	H1	H2
TDA75	124	156	120	106	60	86	347	205	195	90
TDA100	124	156	120	106	60	86	347	205	195	90
TDA150	124	186	120	127	54	120	402	218	217	96

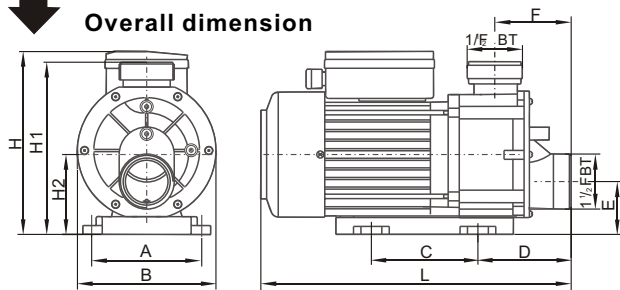

Type Approved  
Safety  
Regular Production  
Surveillance



www.welldana.com  
ID 000021818

EN 60335-1; EN 60335-2-41;  
EN 60335-2-60; EN 62233;  
ERP547


### SAA

AS/NZS60335.1  
AS/NZS60335.2.41  
AS/NZS 60335.2.60



UL FILE E237565  
UL1795  
C22.2, No. 218.2-15

→ TDA75 / TDA120  
110-120V/60Hz



Mariculture circulation filter



Recirculation of water in Bathtub pump





SPA  
Recirculation of water in SPA equipment

## Working conditions

Medium temperature: 5-50  
Environmental temperature: 50  
Max. working pressure: 0.3MPa

≤ °C

## Performance curves

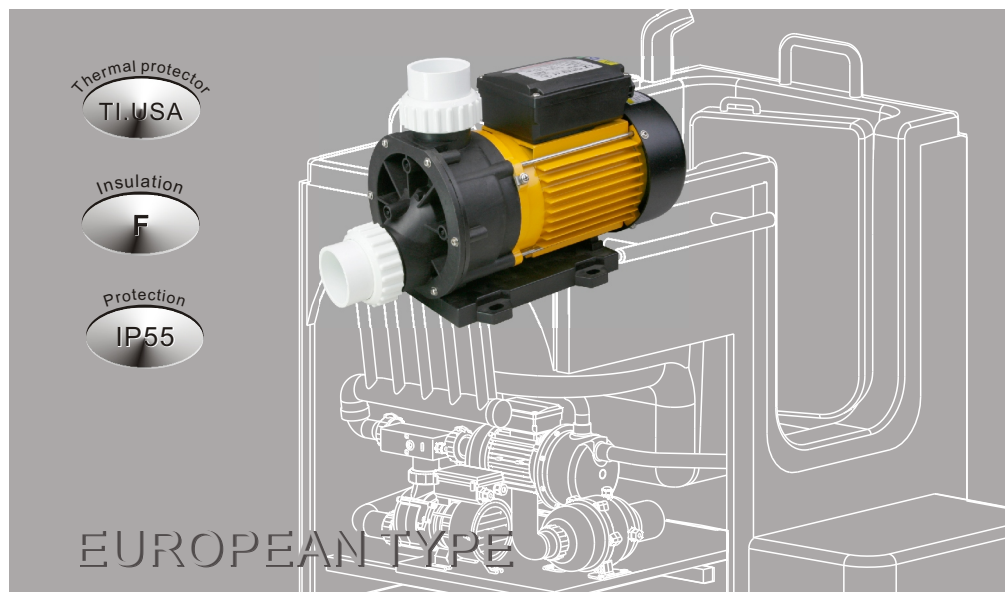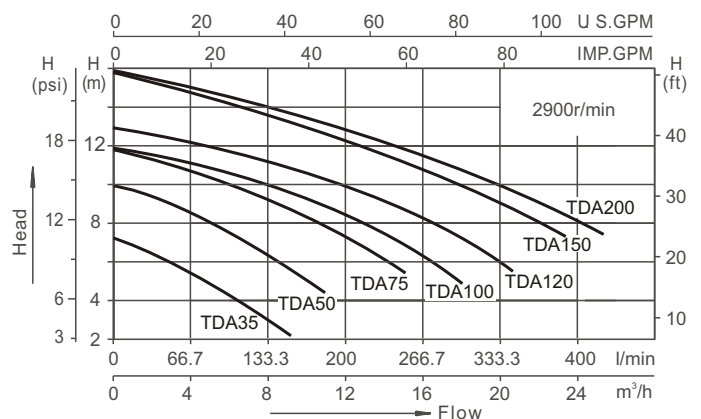

## Technical parameter list

Model	Qmax (l/min)	Hmax (m)	V/Hz	Power(P1)		(Amps)	Fitting size (mm)	G.W (Kg)	Packing size (mm)
				kW	HP				
TDA75	250	12	220-240/50	0.55	0.75	3.2	48.5or50	7.8	380×180×250
TDA100	300	12	220-240/50	0.75	1.0	3.8	48.5or50	8.3	380×180×250
TDA150	380	16	220-240/50	1.1	1.5	5.8	48.5or50	11.4	435×220×270